

Pneumatic Gripper Feed J 380

80 mm² strip cross-section

- Clamping force at 6 bar: 580 N
- Tractive force at 6 bar: 275 N

Scope of delivery


- Feeder complete with cover hood
- Control block with solenoid valve and connection hoses
- Clamping elements made of ground steel




Options

- Pilot release
- Mounting bracket
- Ribbed or nylon clamping elements

Performance diagram

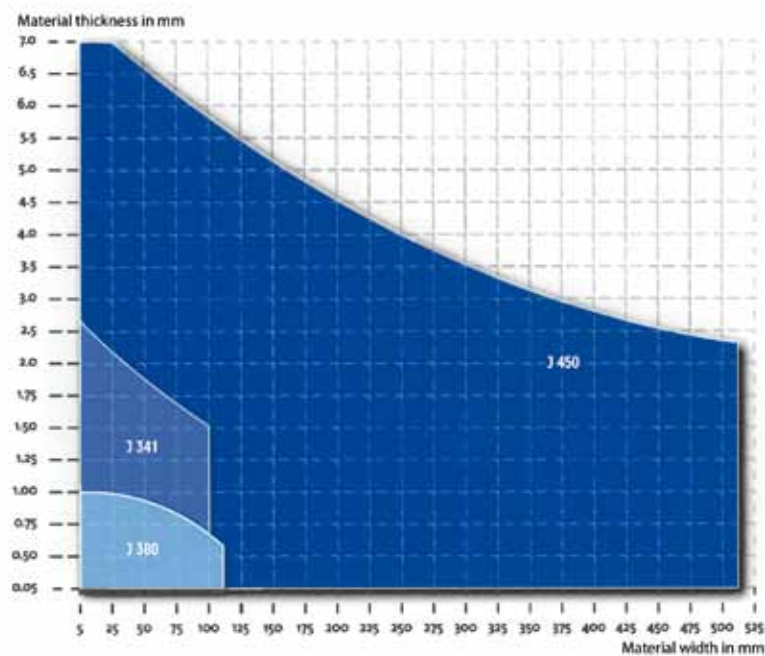

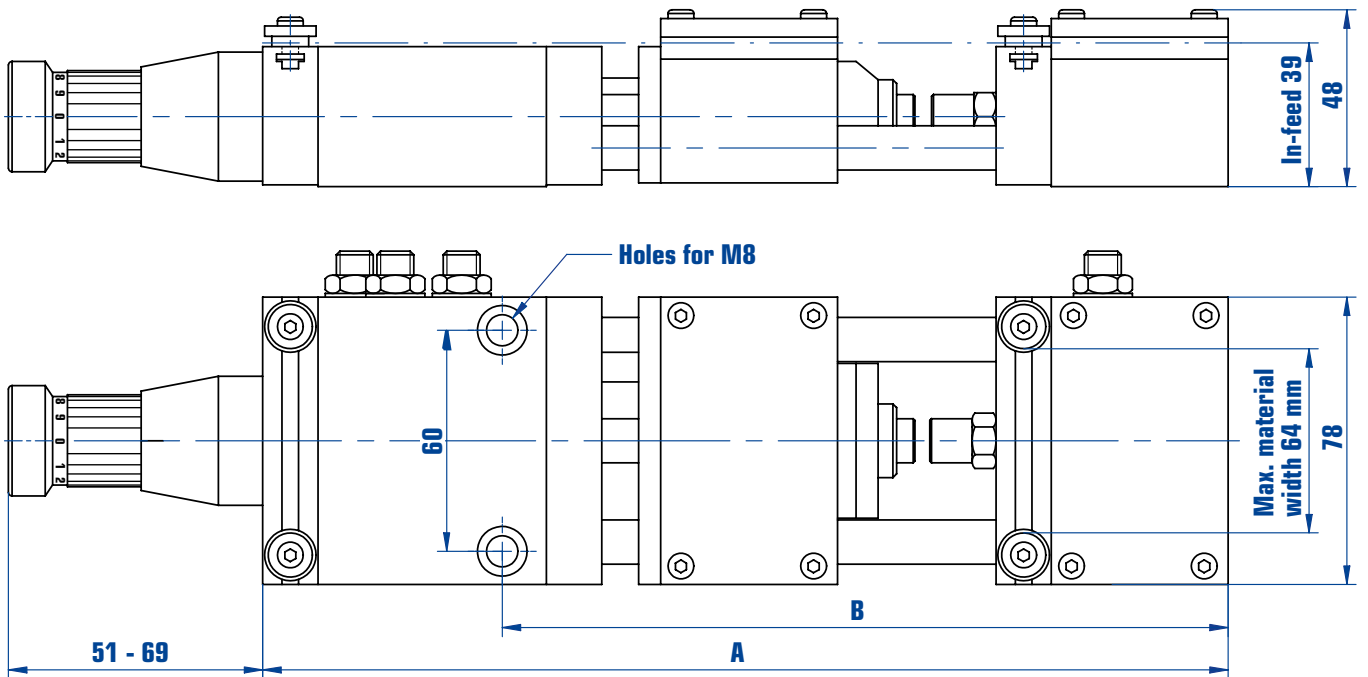

Model order number	Stroke	A	B	Max. frequency non-load	Air consumption per switch play
J 380.030	0 - 33	262	197	300/min.	0.3 l
J 380.060	0 - 66	328	230	250/min.	0.55 l

Technical modifications subject to change. Performance data depends on material.